


ANSI/SPRI/GT-1 TEST PRESSURES UP TO 136 PSF (VERTICAL), AND 223 PSF (HORIZONTAL)

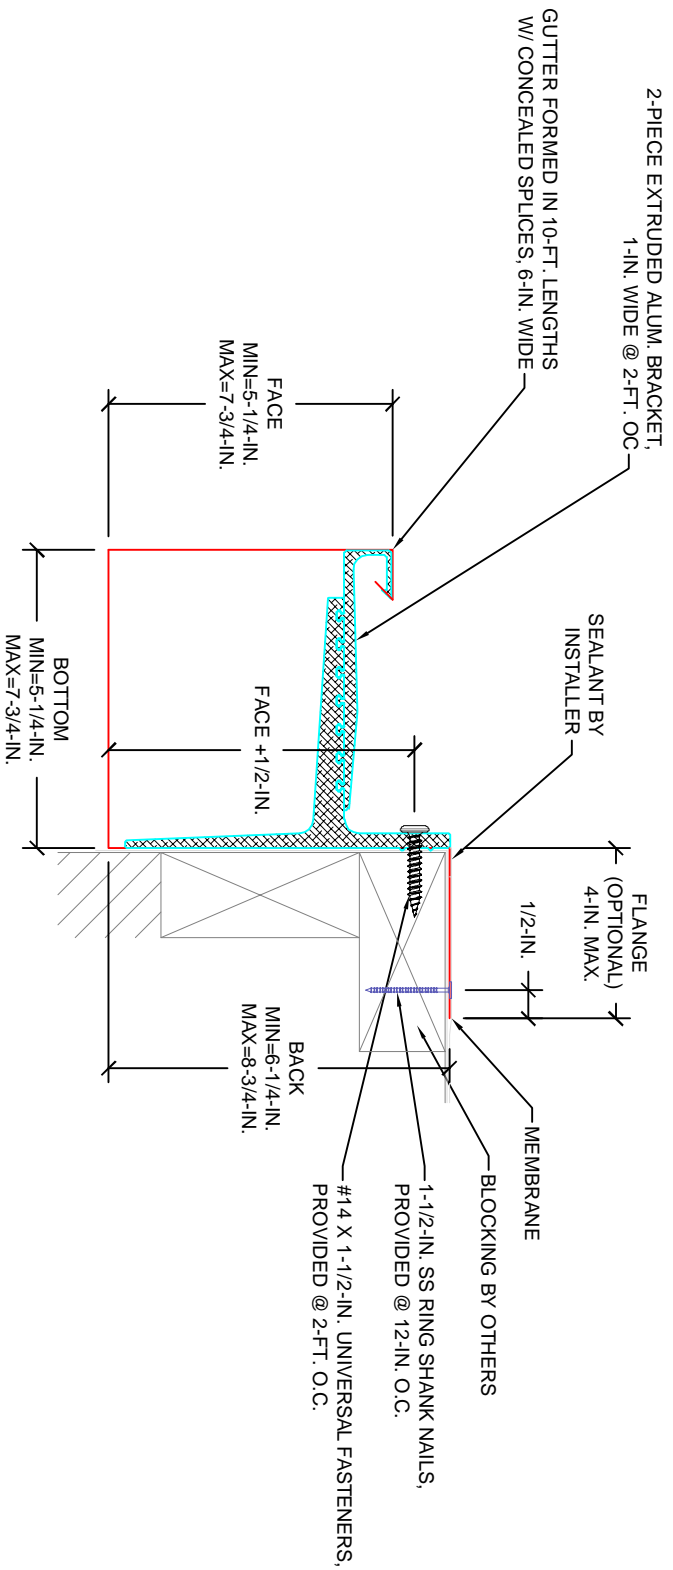

BOTTOM SIZES ARE PROVIDED IN 1/2-IN. INCREMENTS
(e.g. 5-1/4-IN., 5-3/4-IN., 6-1/4-IN.,)

FOR MASONRY APPLICATIONS, PLEASE CONTACT FIRESTONE.
CONTACT FIRESTONE FOR APPROPRIATE RECOMMENDATIONS NEEDED
TO MEET/EXCEED ANSI/SPRI/GT-1 DESIGN CRITERIA

APPLICATIONS
SINGLE-PLY
MOD-BIT
BUR

SIZES:
SEE DRAWING

NOTES:
1- PRODUCT TO BE INSTALLED IN STRICT
ACCORDANCE WITH FIRESTONE PRINTED INSTRUCTIONS.
2- TESTED IN ACCORDANCE WITH ANSI/SPRI/GT-1.

ANSI/SPRI/GT-1 TESTED

		MAKE: FIRESTONE, OM GOLD BOX GUTTER
		DATE: 03/30/2020
DRAWN BY: KCP	DATE: 03/30/2020	SCALE: N/A
APP'D BY: TH	DATE: 03/30/2020	SCALE: NOT TO SCALE
SHEET 1 OF 1		